
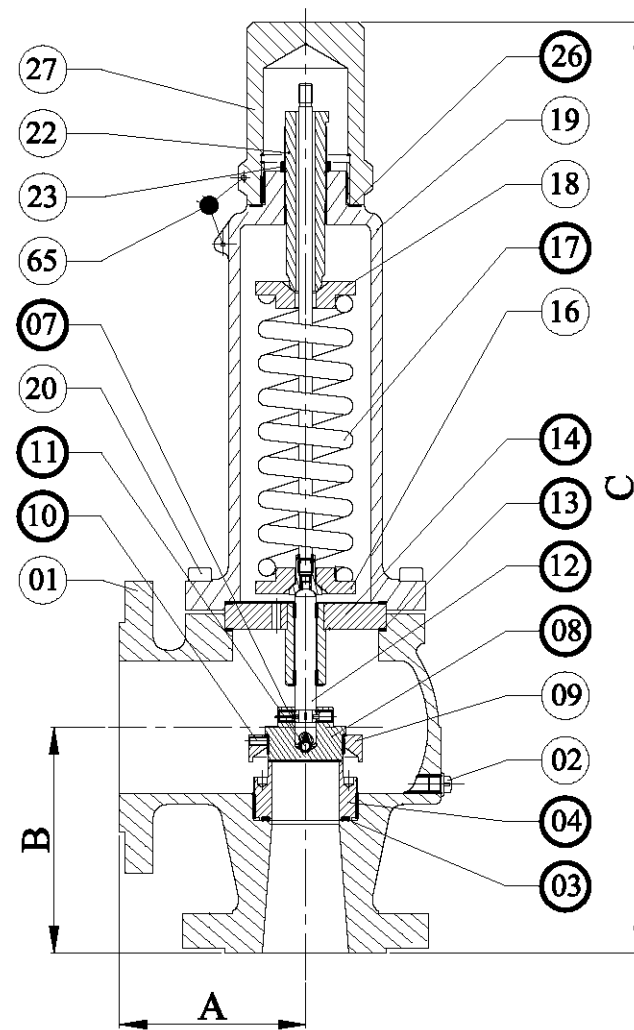


Rp	Nb	DESIGNATION		MATIERE/MATERIAL
01	1	CORPS	BODY	1.4408 / CF8M
02	1	BOUCHON DE PURGE	DRAIN PLUG	INOX / STAINLESS STEEL
03	1	JOINT DE SIEGE	SEAT GASKET	METALLOPLASTIQUE / METALLOPLASTIC
04	1	SIRGE	SEAT	1.4404 / AISI 316L
07	2	VIS DE LIAISON	SCREW	INOX / STAINLESS STEEL
08	1	SOUPAPE	DISC	1.4404 / AISI 316L
09	1	DEFLECTEUR	DISC-HOLDER	1.4404 / AISI 316L
10	1	VIS D'ARRET	SCREW	INOX / STAINLESS STEEL
11	1	BILLE	BALL	1.4404 / AISI 316L
12	1	TIGE	STEM	1.4404 / AISI 316L
13	2	JOINT DE CORPS	BODY GASKET	PTFE / PTFE
14	1	GUIDE TIGE	STEM GUIDE	1.4404 / AISI 316L
16	1	COUPELLE INFERIEURE	UNDER SPRING PLATE	1.4404 / AISI 316L
17	1	RESSORT	SPRING	1.4310 / AISI 302
18	1	COUPELLE SUPERIEURE	UPPER SPRING PLATE	1.4404 / AISI 316L
19	1	FUT	SHANK	1.4408 / CF8M
20		VIS DE CORPS	BODY SCREW	INOX / STAINLESS STEEL
22	1	VIS DE REGLAGE	ADJUSTMENT SCREW	1.4404 / AISI 316L
23	1	C/VIS DE REGLAGE	LOCK NUT	1.4404 / AISI 316L
26	1	JOINT DE BOUCHON	PLUG GASKET	PTFE / PTFE
27	1	BOUCHON DN 20 à 25 DN 40 à 100	PLUG ND 20 / 25 ND 40 à 100	1.4408 / CF8M 1.4404 / AISI 316L
55	1	VIS DE BLOCAGE	BLOCKING SCREW	INOX / STAINLESS STEEL
56	1	ECROU	NUT	INOX / STAINLESS STEEL
58	1	BUTEE A BILLES (DN 80 / 100)	THRUST BALL BEARING	1.4125 / AISI 440C
62	1	JOINT	GASKET	1.4301 / AISI 304L
63	1	VIS	SCREW	INOX / STAINLESS STEEL
65	1	PLOMBAGE	PLUMBING	

- SOUPAPE DE SURETE ACIER INOXYDABLE
- BOUCHON ETANCHE SANS LEVIER
- RACCORDEMENT ENTREE/SORTIE
BRIDES INTEGRALES - PN 16 x 16 ou PN 40 x 16
- CLASS 150 x 150 ou CLASS 300 x 150
- AUTRES CONDITIONS DE SERVICE, RACCORDEMENTS ET MATERIAUX SUR DEMANDE.
- MATERIEL CONFORME AUX DIRECTIVES 97/23/CE ET 94/9/CE

- STAINLESS STEEL SAFETY RELIEF VALVE
- TIGHT PLUG WITHOUT LEVER
- CONNECTION INLET/OUTLET
INTEGRAL FLANGE - PN 16 x 16 or PN 40 x 16
- CLASS 150 x 150 or CLASS 300 x 150
- OTHER WORKING CONDITIONS, CONNECTIONS AND MATERIALS ON REQUEST
- MATERIAL CONFORM TO DIRECTIVE S 97/23/EC AND 94/9/CE

VARIANTES OTHER POSSIBILITIES

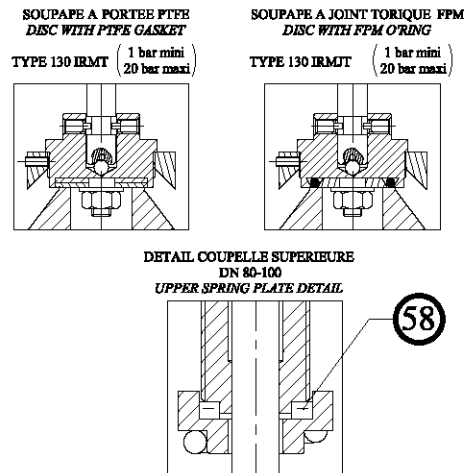

ATTENTION!
VIS DE BLOCAGE MECANISME - A REMPLACER PAR BOUCHON + JOINT AVANT MISE EN SERVICE
BLOCKING SCREW SHOULD BE REPLACED BY SCREW+GASKET BEFORE USE

PIECES DE REMPLACEMENT CONSEILLEES
RECOMMENDED SPARE PARTS

CE DOCUMENT PEUT ETRE MODIFIE SANS AVIS PREALABLE
ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ENTREE INLET		SORTIE OUTLET		A	B	C	P.D.O (bar) SET PRESSURE MINI 0,25 bar			SECTION DE PASSAGE CROSS SECTION (mm ²)		POIDS WEIGHT (Kg)	
PN 40	CLASS 300/150	PN 16	CLASS 150				MAXI			130IRM 130IRMT 130IRMVB	130IRMT		
PN 16							PN 16	CL150	PN 40	CL300			
20	3/4"	40	1.1/2"	100	105	440		18	39	49	380	227	18
25	1"	40	1.1/2"	100	105	440		18	39	49	380	227	18
40	1.1/2"	65	2.1/2"	115	140	580		18	39	49	1018	660	30
50	2"	80	3"	120	150	600		18	39	49	1590	1018	35
65	2.1/2"	100	4"	140	170	675	15				1963	1735	55
80	3"	125	5"	160	195	800	15	18	39	40	3317	2827	80
100	4"	150	6"	180	220	845	15	18	25	25	5024	4071	110

A	16/01/09	EDITION ORIGINALE / INITIAL ISSUE	OZIL	DBELLE
 Impresa "Los Bellizans" 69380-CHESSY-LES-MINES Tél: 33(0)4.78.43.91.52 Fax: 33(0)4.78.43.91.01 www.valves.com		SOUPAPE DE SURETE SAFETY RELIEF VALVE TYPE 130 IRM - DN 20/.../100 PN16 - PN40 / CL150 - CL300		<h1>3130 I</h1>