


Rp	Nb	DESIGNATION		MATIERE / MATERIAL
80	1	CORPS	BODY	1.4404/ 316L
81	1	RACCORD	FITTING	1.4404/ 316L
83	1	CLAPET DEPRESSION	VACUUM DISC	1.4404/ 316L
84	1	TIGE	STEM	INOX/ STAINLESS STEEL
85	2	JOINT DE CORPS	BODY GASKET	PTFE
86	1	BUTEE D'OUVERTURE	THRUST	1.4310/ AISI 302
88	1	RESSORT DEPRESSION	VACUUM SPRING	1.4310/ AISI 302
90	1	ECROU	NUT	INOX/ STAINLESS STEEL
91	1	SIEGE DEPRESSION	VACUUM SEAT	1.4404/ 316L
93		ECROU BORGNE	NUT	INOX/ STAINLESS STEEL
94	1	GRILLE DE PROTECTION	SCREEN	INOX/ STAINLESS STEEL
95	1	COUPELLE DE REGLAGE	ADJUSTMENT SCREW	1.4404/ AISI 316L
96	3	VIS SANS TETE	SCREW	INOX/ STAINLESS STEEL
97	1	CAPOT PROTECTEUR	WEATHER HOOD	1.4404/ AISI 316L
98		COLONNETTE	COLUMN	1.4305/ AISI 303

- SOUPAPE DEPRESSION EN ACIER INOXYDABLE
- RACCORDEMENT :
ENTREE=FILETEE GAZ CYLINDRIQUE OU NPT
SORTIE=ECHAPPEMENT LIBRE

- AUTRES CONDITIONS DE SERVICE, RACCORDEMENTS
ET MATERIAUX SUR DEMANDE.
- MATERIEL CONFORME AUX DIRECTIVES 97/23/CE
ET ATEX 94/9/CE

- STAINLESS STEEL VACUUM RELIEF VALVE
- CONNECTIONS :
INLET=THREADED CYLINDRICAL BSP OR NPT
OUTLET= ATMOSPHERE

- OTHER WORKING CONDITIONS, CONNECTIONS AND
MATERIALS ON REQUEST
- MATERIAL CONFORM TO PED 97/23/EC
AND ATEX 94/9/EC

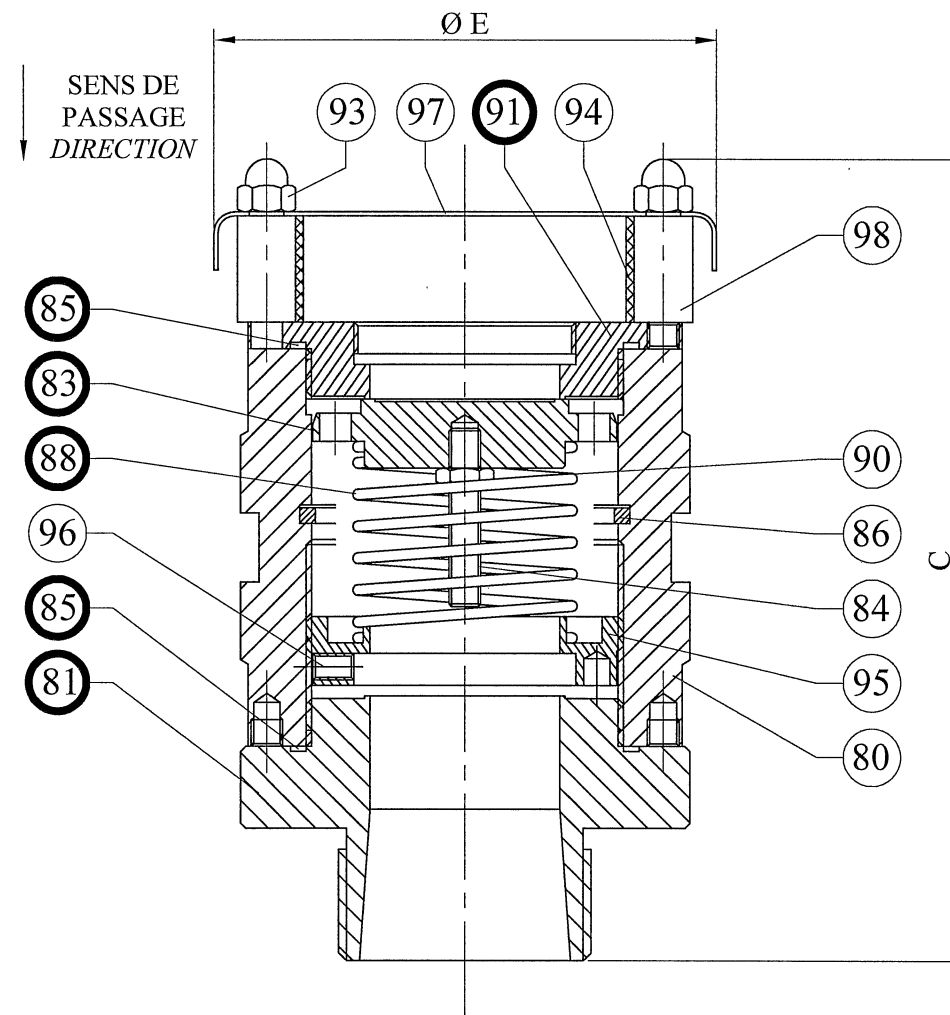

RACCORDEMENT CONNECTION		C	Ø E	P.D.O (DEPRESSION) SET PRESSURE (VACUUM) (bar)		SECTION DE PASSAGE CROSS SECTION (mm2)	MASSE WEIGHT (Kg)
DN/ ND	ENTREE/ INLET GAZ/ BSP - NPT			Mini	Maxi		
20	3/4"	135	80	- 0.01	- 0.8	225	1.6
25	1"	135	80	- 0.01	- 0.8	225	1.8
32	1.1/4"	135	80	- 0.01	- 0.8	225	2.0
40	1.1/2"	150	95	- 0.01	- 0.8	384	2.5
50	2"	150	95	- 0.01	- 0.8	384	2.8

PIECES DE RECHANGE CONSEILLEES
RECOMMENDED SPARE PARTS

CE DOCUMENT PEUT ETRE MODIFIE SANS AVIS PREALABLE
ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

C	25/10/13	MISE A JOUR / UP DATING		GAUDILLER	SCHMUNCK
H+ VALVES 557 Impasse Les saillants 69380-CHESSEY-LES-MINES Tél: 33 (0)4.78.43.91.52 Fax: 33 (0)4.78.43.91.01 www.hvalves.com		SOUPAPE DEPRESSION VACUUM RELIEF VALVE REF 610IRM - GAZ/BSP - NPT DN 20/ .../50 - PN 10			3610 IM