

UNI-S86

2-delt kugleventil
2-piece ballvalve
2-teiliger Kugelhahn

DN8 – 80

PN63


Type / series / baureihe

- Full-bore / full-bore / voller Durchgang
- BSP gevindender mufte-mufte (RG) / threaded connections / Innengewinde
- AISI 316 / 1.4408
- Låsbart håndtag / locking device / Verschluss-vorrichtung

Optioner / options / Optionen

- NPT-gevind / NPT thread / NPT Innengewinde

Materialecertifikat / material certificate / Werkstoffzertifikat - EN10204-3.1.B

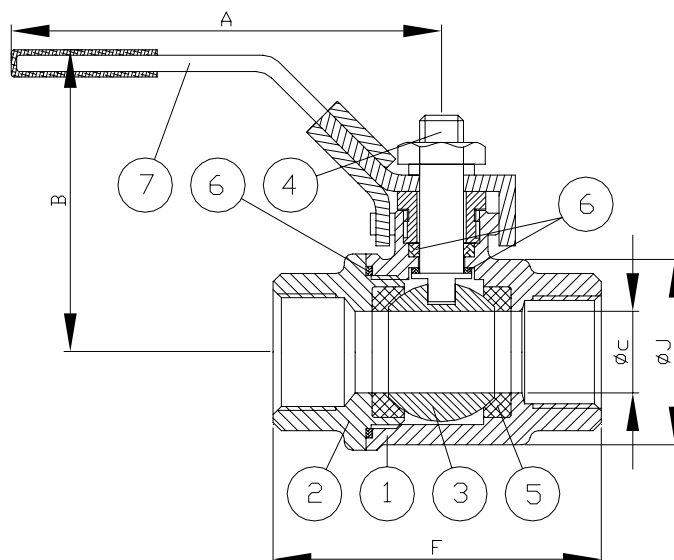

Pos.	Del	Materiale	Part	Material	Teil	Werkstoffe
1	Hus	AISI316	Body	AISI316 (CF8M)	Gehäuse	1.4408
2	Gevindender	AISI316	Threaded connections	AISI316	Innengewinde	1.4408
3	Kugle	AISI316	Ball	AISI316	Kugel	1.4408
4	Spindel	AISI316	Stem	AISI316	Spindel	1.4408
5	Sæder	PTFE	Seat	PTFE	Sitzdichtung	PTFE
6	Øvrige pakninger	PTFE	Other gaskets	PTFE	Übrigen Dichtungen	PTFE
7	Håndtag	AISI304	Handle	AISI304	Hahngriff	1.4301

DN	øC	F	A	B	øJ	Vægt Weight Gewicht
8	11,6	52	99	50	32,5	0,28
10	12,7	52	99	50	32,5	0,25
15	15	58	121	53	36,5	0,35
20	20	65	121	64	43,8	0,52
25	25,4	78	121	66	51,0	0,75
32	32	91	121	79	63,5	1,15
40	38	104	180	83	75,3	1,89
50	50,8	126	180	94	92,5	2,99
65	65	158	245	136	110,2	6,01
80	80	186	245	149	135,6	9,47

Ret til ændringer forbeholdes / subject to changes / Änderungen vorbehalten