

Uni-Valve A/s

VENTILER & INSTRUMENTER




Telefon (+45) 43 43 82 00 • Telefax (+45) 43 43 74 75 • mail@uni-valve.com • www.uni-valve.com

Wire-Matic

Pneumatisk aktuator
Pneumatic actuator
Pneumatisch Antrieb

Dimensioner
Dimensions
Masse

WM4 – WM35
180°

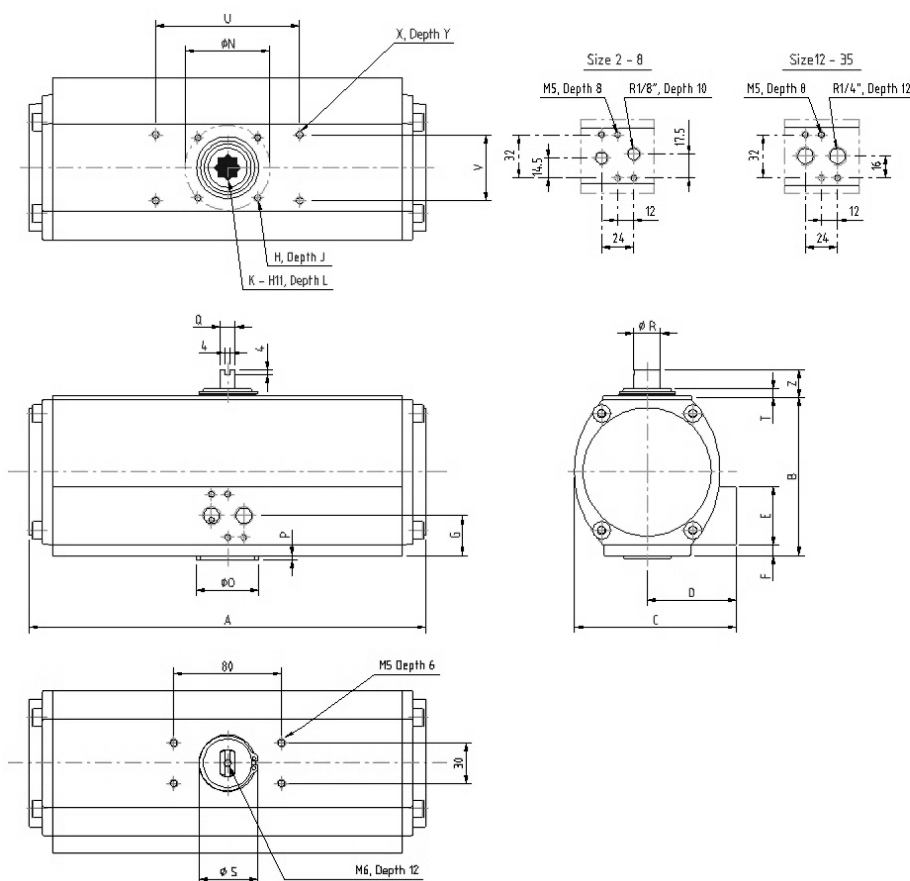

TYPE	ISO	A	B	C	D	E	F	G	H	J	K _{H11}	L _{min}	ØN	ØO	P	Q	ØR	ØS	T	U	V	X	Y _{min}	Z
WM4	F04	215	91	88	48	41	-	21	M5	8	11	12	42	30	2	11.5	20	31	4.5	73	32	M5	8	20
WM8	-	245	109	105	57	42	7.5	29	-	-	14	16	-	35	3	11.5	20	35	5.0	73	32	M6	10	20
WM12	F07	295	119	121	67	43	8.0	30	M8	13	17	16	70	55	3	11.5	20	46	5.5	107	49	M6	10	20
WM20	F07	337	141	137	72	43	8.0	30	M8	13	17	19	70	55	3	19.0	32	50	6.5	120	60	M6	10	20
WM35	F10	402	167	165	78	43	8.5	30	M10	16	22	24	102	70	3	19.0	32	61	7.0	161	73	M8	12	20

Moment (Nm) / torque (Nm) / Drehmoment (Nm):

TYPE	2 bar	3 bar	4 bar	5 bar	5,5 bar	6 bar	7 bar	8 bar	9 bar	10 bar	Vægt/weight/Gewicht
WM4	15	23	30	38	41	45	53	60	68	76	2,2
WM8	27	41	54	68	75	82	95	105	123	136	3,5
WM12	43	66	89	111	122	134	157	180	202	225	5,3
WM20	75	112	150	187	206	224	262	299	337	374	8,2
WM35	135	203	271	339	375	408	476	544	612	680	12,8

Ret til ændringer forbeholdes / subject to changes / Änderungen vorbehalten